

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) EP 1 182 619 A2

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:  
27.02.2002 Bulletin 2002/09

(51) Int Cl.7: G06T 17/00

(21) Application number: 01307001.6

(22) Date of filing: 17.08.2001

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE TR  
Designated Extension States:  
AL LT LV MK RO SI

(71) Applicant: Biosense, Inc.  
New Brunswick, New Jersey 08933-7003 (US)

(72) Inventor: Keldar, Yaron  
Haifa Israel 34990 (IL)

(30) Priority: 18.08.2000 US 643666


(74) Representative: Mercer, Christopher Paul et al  
Carpmaels & Ransford 43, Bloomsbury Square  
London WC1A 2RA (GB)

(54) Method and apparatus for three-dimensional image rendering of body organs

(57) A method for mapping a structure in a body of a subject includes capturing a three-dimensional (3D) image of the structure comprising diagnostic information, and generating a 3D geometrical map of the structure using a probe inserted into the structure. The image

is registered with the map, such that each of a plurality of image points in the image is identified with a corresponding map point in the map. The map is displayed such that the diagnostic information associated with each of the image points is displayed at the corresponding map point.

FIG. 1

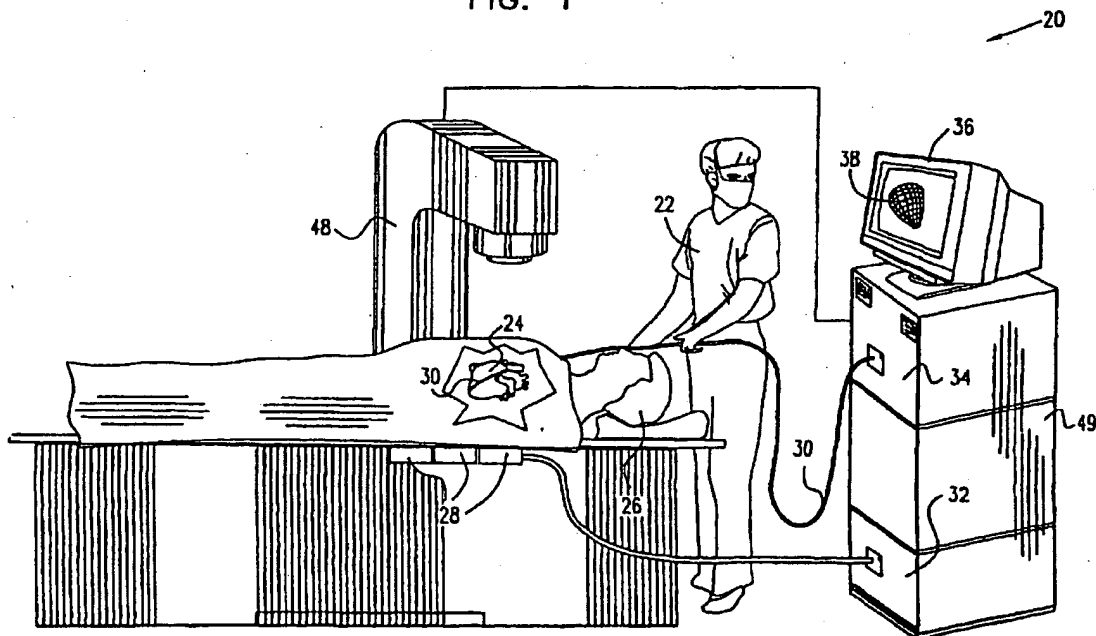

EP 1 182 619 A2

**Description****FIELD OF THE INVENTION**

- 5 [0001] The present invention relates generally to systems and methods for three-dimensional mapping and reconstruction, and specifically to mapping and reconstruction of the interior of body organs, such as the heart.

**BACKGROUND OF THE INVENTION**

- 10 [0002] Various methods of diagnostic imaging are known in the art. Methods used for imaging the heart, for example, include fluoroscopy, angiography, echocardiography, computed tomography (CT), magnetic resonance imaging (MRI), positron emission tomography (PET) and single photon emission tomography (SPECT). Many of these methods produce three-dimensional (3D) image information, which can then be rendered for viewing in the form of parallel slices through the heart, or as a pseudo-3D display on a video monitor. In order to administer treatment, the treating physician  
15 must build a 3D picture in his or her mind based on the two-dimensional pictures that are displayed. The transposition is particularly tricky when therapy is to be administered inside the heart, such as local electrical ablation of aberrant electrical pathways, or laser myocardial revascularization.

- [0003] It is also known in the art to map the heart using a mapping probe, typically a catheter, inside the heart chambers. Exemplary methods and devices for this purpose are described in U.S. Patents 5,471,982 and 5,391,199  
20 and in PCT patent publications WO94/06349, WO96/05768 and WO97/24981, whose disclosures are incorporated herein by reference. U.S. Patent 5,391,199, for example, describes a catheter that includes both electrodes for sensing cardiac electrical activity and miniature coils for determining the position of the catheter relative to an externally-applied magnetic field. Using this catheter a cardiologist can collect data from a set of sampled points in the heart within a short period of time, by measuring the electrical activity at a plurality of locations and determining the spatial coordinates  
25 of the locations. Locations of the mapping catheter within the heart can be superimposed on a 3D reconstruction of an image of the heart, such as an ultrasound image, acquired prior to or during the catheter study. Color codes are used to represent electrical activity sensed by the catheter.

- [0004] U.S. Patent 5,738,096, whose disclosure is incorporated herein by reference, describes methods for geometrical mapping of the endocardium based on bringing a probe into contact with multiple locations on a wall of the heart, and determining position coordinates of the probe at each of the locations. The position coordinates are combined to form a map of at least a portion of the heart. Once the position of the catheter is known, external sensors can be used to provide local physiological values of heart tissue adjacent to the tip of the catheter. For example, if the catheter incorporates a radioactive marker suitable for SPECT, local functional information can be gleaned from a SPECT image. Yet another example is determining local perfusion from Doppler-ultrasound images of the coronaries, from nuclear  
35 medicine images or from X-ray or CT angiography, and overlaying the perfusion map on the geometrical map. The image of the catheter in the perfusion map can be used to align the perfusion map and the geometrical map. Alternatively, the alignment may be carried out using fiducial marks or anatomical reference locations, either automatically or manually.

- [0005] Further methods for creating a three-dimensional map of the heart based on these data are disclosed, for  
40 example, in European patent application EP 0 974 936 and in EP-A-0 974 936 whose disclosure is incorporated herein by reference. As indicated in these applications, position coordinates (and optionally electrical activity, as well) are initially measured at about 10 to 20 points on the interior surface of the heart. These data points are generally sufficient to generate a preliminary reconstruction or map of the cardiac surface to a satisfactory quality. The preliminary map is preferably combined with data taken at additional points in order to generate a more comprehensive map.

**SUMMARY OF THE INVENTION**

[0006] It is an object of some aspects of the present invention to provide improved methods and apparatus for mapping and visualization of internal body structures, and particularly of the heart.

- 50 [0007] It is a further object of some aspects of the present invention to provide improved methods and apparatus for administering local treatment of pathological conditions within the heart.

- [0008] In preferred embodiments of the present invention, a position-sensing catheter is used to generate a 3D geometrical map of the internal surface of a heart chamber of a subject. A 3D diagnostic image of the heart is captured in conjunction with generating the 3D map, typically either before or concurrently with the mapping. The image and  
55 map are brought into mutual registration, and diagnostic information from the image, such as perfusion information, is then marked on the 3D map, preferably in the form of color coding. Based on the combined diagnostic and geometrical information, a physician operating the catheter is able to identify and visualize areas of the heart that are in need of treatment, due to low perfusion, for example. The physician preferably uses the catheter to apply a local invasive

therapy, such as laser revascularization, to specific points that are located using the color-coded 3D map. Alternatively, a local diagnostic technique, such as a biopsy, may be performed at such specific points.

[0009] There is therefore provided, in accordance with a preferred embodiment of the present invention, a method for mapping a structure in a body of a subject, including:

- 5 capturing a three-dimensional (3D) image of the structure including diagnostic information;
- generating a 3D geometrical map of the structure using a probe inserted into the structure;
- registering the image with the map, such that each of a plurality of image points in the image is identified with a corresponding map point in the map; and
- 10 displaying the map, such that the diagnostic information associated with each of the image points is displayed at the corresponding map point.

[0010] In a preferred embodiment, the diagnostic information is related to blood flow in the structure, wherein the diagnostic information includes local perfusion data. In other preferred embodiments, the diagnostic information includes metabolic data, or is related to uptake of a substance in tissue of the structure, or is related to motion of the structure.

[0011] Preferably, generating the geometrical map includes bringing the probe into contact with the structure at a multiplicity of locations on the structure, and recording position coordinates of the probe at the locations, wherein recording the position coordinates includes determining the coordinates using a position sensor in the probe.

20 [0012] Preferably, registering the image with the map includes applying a transformation to at least one of the image and the map so that following the transformation, the image and the map have a common axis and a common scale. Further preferably, registering the image with the map includes dividing the image into a plurality of parallel planar slices, perpendicular to the axis and mutually spaced along the axis, wherein the plurality of image points are located in the slices. More preferably, registering the image with the map includes finding an axial coordinate of each of the slices and an angular coordinate of each of the image points located in each of the slices, and identifying each of the image points with the map point having the same axial and angular coordinates. Most preferably, the structure includes a wall defining a cavity, and identifying each of the image points with the map point includes finding, at the axial and the angular coordinate, the image point that is within a section of the wall.

[0013] Preferably, displaying the map includes coloring the map to reflect the diagnostic information.

30 [0014] In a preferred embodiment, the method includes performing a medical procedure on the structure guided by the diagnostic information displayed on the map. Preferably, performing the medical procedure includes using the probe to perform the procedure locally at locations selected on the geometrical map, and the method includes marking on the geometrical map the locations at which the procedure was performed. Additionally or alternatively, performing the medical procedure includes performing a therapeutic procedure, wherein the diagnostic information relates to local blood flow in the structure, and wherein performing the therapeutic procedure includes performing a procedure for improving the local blood flow. Alternatively, performing the medical procedure includes performing a diagnostic procedure.

35 [0015] Preferably, the structure includes a heart of the subject, and generating the geometrical map includes mapping an endocardial surface in a ventricle of the heart.

40 [0016] There is also provided, in accordance with a preferred embodiment of the present invention, apparatus for mapping a structure in a body of a subject, including:

- an imaging device, adapted to capture a three-dimensional (3D) image of the structure including diagnostic information;
- 45 a probe, adapted to be inserted into the structure, so as to generate a 3D geometrical map of the structure;
- a processor, coupled to the probe and to the imaging device, and adapted to register the image with the map, such that each of a plurality of image points in the image is identified with a corresponding map point in the map; and
- a display, coupled to be driven by the processor to display the map, such that the diagnostic information associated with each of the image points is displayed at the corresponding map point.

50 [0017] The present invention will be more fully understood from the following detailed description of the preferred embodiments thereof, taken together with the drawings in which:

## BRIEF DESCRIPTION OF THE DRAWINGS

55 [0018]

Fig. 1 is a schematic, pictorial illustration of a system for imaging, mapping and treatment of the heart, in accordance

with a preferred embodiment of the present invention;

Fig. 2 is a flow chart that schematically illustrates a method for imaging, mapping and treating the heart, in accordance with a preferred embodiment of the present invention;

Fig. 3 is a schematic representation of a map of a chamber of the heart, in accordance with a preferred embodiment of the present invention;

Fig. 4 is a simplified geometrical representation of the map of Fig. 3, showing coordinates used in registering the map with an image of the heart, in accordance with a preferred embodiment of the present invention;

Fig. 5 is a schematic, exploded view of a 3D image of the heart, represented as a stack of parallel slices through the heart, in accordance with a preferred embodiment of the present invention;

Fig. 6 shows the slices of Fig. 5 arrayed side-by-side, illustrating registration of the slices with the 3D map of Fig. 3, in accordance with a preferred embodiment of the present invention; and

Fig. 7 is a schematic representation of the map of Fig. 3, after coloring of the map with diagnostic information from the image of Figs. 5 and 6, in accordance with a preferred embodiment of the present invention.

#### DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

[0019] Fig. 1 is a schematic, pictorial illustration of a system 20 for three-dimensional geometrical mapping, imaging and treatment of a heart 24 of a subject 26, in accordance with a preferred embodiment of the present invention. System 20 comprises an elongate probe, preferably a catheter 30, which is inserted by a user 22 through a vein or artery of the subject into a chamber of the heart.

[0020] Catheter 30 preferably comprises at least one position sensor (not shown in the figures), most preferably located near the catheter's distal tip. The position sensor preferably comprises an electromagnetic sensor, which is mounted within the catheter by any suitable method, for example, using polyurethane glue or the like. The sensor is electrically connected to an electromagnetic sensor cable, which extends through the catheter body and into a control handle of the catheter. In the control handle, the wires of the sensor cable are connected to a circuit board (not shown), which amplifies the signals received from the electromagnetic sensor and transmits them to a computer housed in a console 34, in a form understandable to the computer. Because the catheter is designed for single use only, the circuit board preferably contains an EPROM chip, which shuts down the circuit board after the catheter has been used. This prevents the catheter, or at least the electromagnetic sensor, from being used twice.

[0021] To use the electromagnetic sensor, subject 26 is placed in a magnetic field generated, for example, by situating under the patient a pad containing field generator coils 28 for generating a magnetic field, driven by driver circuits 32. A reference electromagnetic sensor (not shown) is preferably fixed relative to the patient, e.g., taped to the patient's back, and catheter 30 containing its sensor is advanced into heart 24. The sensor preferably comprises three small coils, which in the magnetic field generate weak electrical signals indicative of their position in the magnetic field. Signals generated by both the fixed reference sensor and by the sensor in the heart are amplified and transmitted to console 34, which analyzes the signals and then displays the results on a monitor 36. By this method, the precise location of the sensor in the catheter relative to the reference sensor can be ascertained and visually displayed. The sensors can also detect displacement of the catheter that is caused by contraction of the heart muscle.

[0022] Suitable electromagnetic sensors for the purposes of the present invention are described, for example, in the above-mentioned U.S. Patent 5,391,199 and PCT patent publication WO 96/05768. A preferred electromagnetic mapping sensor is manufactured by Biosense Ltd. (Tirat Hacarmel, Israel) and marketed under the trade designation NOGA. Some of the mapping features of catheter 30 and system 20 are implemented in the NOGA-STAR catheter marketed by Biosense Webster, Inc., and in the Biosense-NOGA system, also marketed by Biosense Webster, Inc. Further aspects of the design of catheter 30 and of system 20 generally are described in EP-A-1 125 549 which is incorporated herein by reference. Using such sensors, system 20 achieves continuous generation of six dimensions of position and orientation information with respect to catheter 30. Alternatively, the sensors used in catheter 20 may comprise other types of position and/or coordinate sensors, as described, for example, in U.S. Patent 5,391,199, 5,443,489 or 5,515,853, or in PCT publication WO 94/04938 or WO 99/05971, or substantially any other suitable type of position/coordinate sensing device known in the art.

[0023] As noted above, catheter 30 is coupled to console 34, which enables the user to observe and regulate the functions of the catheter. Console 34 includes a processor, preferably a computer with appropriate signal processing circuits (which are typically contained inside a housing of the computer). The processor is coupled to drive display 36.

User 22 brings the distal tip of catheter 30 into contact with multiple points on the endocardial surface of heart 24, and the position coordinates are recorded at each point. The information derived from this analysis is used to reconstruct a three-dimensional geometrical map 38 of the endocardial surface of heart 24.

[0024] System 20 also comprises a diagnostic imaging unit 48, such as an echo Doppler unit, SPECT, PET, MRI, CT or other imaging unit known in the art. Unit 48 is used to capture a 3D diagnostic image of heart 24, preferably while user 22 is mapping the heart using catheter 30. Alternatively, the diagnostic image is captured before beginning the mapping, and unit 48 may, in this case, be separate from the other elements of system 20. Diagnostic data from the image captured by unit 48 are superimposed on map 38, using methods described hereinbelow. Depending on the type and configuration of unit 48, a wide range of different diagnostic data may be represented in the image, such as perfusion, metabolic factors, uptake of markers, heart wall motion or thickness, and/or other anatomical or electrical properties, as are known in the art. The image can also be timed to represent different phases in the heart cycle.

[0025] Typically, system 20 includes other elements, some of which are not shown in the figures for the sake of simplicity. In the present embodiment, the system preferably includes a laser console 49, which is used in performing direct myocardial revascularization, as described, for example, in PCT patent application PCT/IL97/00011 and in U.S. patent application 09/109,820, which is assigned to the assignee of the present patent application and whose disclosure is incorporated herein by reference. Console 49 injects laser energy into a suitable waveguide (not shown) within catheter 30. The waveguide conveys the energy to the distal tip of the catheter, where it is applied to revascularize areas of the myocardium suffering from low perfusion. Alternatively, the system may include other therapeutic elements, as are known in the art, particularly elements for delivering local treatment in the heart, such as a radio-frequency driver coupled to an ablation electrode on catheter 30; an ultrasound generator coupled to high-power transducer in the catheter, for ultrasonic ablation of the endocardium; or a supply of a therapeutic agent, such as growth factors for angiogenesis, coupled to an injection needle in the catheter. Still further alternatively, the system may include invasive diagnostic elements, such as biopsy forceps that are operated through catheter 30.

[0026] Other elements that may be comprised in system 20 are described, for example, in EP-A-0 974 936.

[0027] Typically, system 20 includes an ECG monitor (not shown), coupled to receive signals from one or more body surface electrodes, so as to provide an ECG synchronization signal to console 34. As mentioned above, the system preferably also includes a reference position sensor, either on an externally-applied reference patch attached to the exterior of the patient's body, or on an internally-placed catheter, which is inserted into heart 24 and maintained in a fixed position relative to the heart. By comparing the position of catheter 30 to that of the reference catheter, the coordinates of catheter 30 are accurately determined relative to the heart, irrespective of heart motion. Alternatively, any other suitable method may be used to compensate for heart motion.

[0028] Fig. 2 is a flow chart that schematically illustrates a method for imaging, mapping and treatment of heart 24 using system 20, in accordance with a preferred embodiment of the present invention. At an imaging step 50, a diagnostic image of heart 24, such as a SPECT image, is captured. Preferably, although not necessarily, the image is captured while catheter 30 is already located inside the heart. The catheter is used to generate geometrical map 38, at a mapping step 52. Suitable mapping techniques for this purpose are described in the above-mentioned U.S. Patent 5,738,096. The above-mentioned European patent application EP 0 974 936 describe accurate methods for creating the map itself based on the data gathered using catheter 30. The image captured at step 50 and the map created at step 52 are then registered one with the other, at a registration step 54.

[0029] Figs. 3 and 4 are schematic representations of map 38 generated by system 20 at step 52, illustrating a method used at registration step 54, in accordance with a preferred embodiment of the present invention. Fig. 3 is a wire frame rendition of the map, representing the left ventricle of heart 24. For the purposes of step 54, a longitudinal axis 72 is drawn through the map, passing through an apex 74 of the ventricle. Preferably, the axis and apex are found automatically by console 34. Alternatively or additionally, these or other features of the map are identified manually by user 22.

[0030] Fig. 4 is a simplified geometrical representation of a surface 80 of map 38, generated for the purpose of registration with a diagnostic image of heart 24. Surface 80 corresponds to an approximate locus of the endocardium of the heart, as determined from map 38. A coordinate system is defined in which each point 82 on surface 80 is represented by a distance  $R$  from apex 74 and an angle  $\alpha$  relative to a downward direction 84 (i.e., the direction pointing toward the feet of subject 26).

[0031] In order to register the diagnostic image with map 38, axis 72 and apex 74 are identified in the image, as well, and are aligned with the axis and apex of the map. The identification is preferably automatic but may, alternatively or additionally, be carried out or assisted by user 22. Other landmarks and/or fiducial marks in the heart can also be used in performing the alignment. The scale of the image is adjusted so that its dimensions match those of the map as closely as possible. For many types of diagnostic images, such as perfusion maps, the resolution of the diagnostic information is low, so that imprecision of as much as 10 mm in mutual registration can be tolerated. When higher resolution is required, the registration of the diagnostic image with the geometrical map may be improved using methods of automatic registration such as those described in Appendix A. These methods are optional and are not essential to

the present invention.

[0032] Fig. 5 is a schematic, exploded view of a 3D diagnostic image 90 of heart 24, following registration of the 3D image with geometrical map 38, in accordance with a preferred embodiment of the present invention. This view is generated at a bullseye rendition step 56 in the method of Fig. 2. The bullseye rendition of image 90 comprises a stack of parallel slices 92, which are perpendicular to axis 72. The slices are preferably taken at a fixed slice increment one from another along the axis. Each slice shows a section 94 of image 90, at a distance R from apex 74 that is determined by the slice number.

[0033] Fig. 6 shows slices 92 of image 90 arrayed side-by-side, illustrating extraction of diagnostic data from the slices for application to map 38, in accordance with a preferred embodiment of the present invention. Referring, for example, to slice number 5, sectional image 94 comprises three essential parts: an inner region 100, showing the inside of the ventricle; a wall region 102, showing the myocardium; and an outer region 104, external to the heart. The diagnostic information of interest is in region 102. Assuming image 90 to be a SPECT image, showing perfusion in the heart wall, for example, region 102 will typically have the highest value of perfusion.

[0034] At a coloration transfer step 58, the diagnostic information from each slice 92 is transferred to map 38. Each slice has a known value of distance R from apex 74. For each angle  $\alpha$  within the slice, point 82 on surface 80 of the map (Fig. 4) is assumed to be the point at that angle that is located radially in the middle of region 102. In the case that image 90 is a perfusion image, point 82 is simply taken to be the point of highest perfusion at the given angle. In other imaging modalities, finding region 102 is, for the most part, similarly straightforward. The value of the diagnostic data at each point 82 is preferably represented as a color applied to the corresponding region of map 38.

[0035] Fig. 7 is a schematic representation of a colored geometrical map 110, as produced at step 58, in accordance with a preferred embodiment of the present invention. Because of the limited ability of a line drawing to convey qualities of a color image, only two different color regions appear on map 110: a well-perfused region 112, and an ischemic region 114. Preferably, the ischemic region has a darker or "cooler" color than the well-perfused region. In actual applications, in which display 36 comprises a color monitor, a broad range of different colors is used in map 110 to describe different levels of perfusion or of other diagnostic qualities.

[0036] Preferably, system 20 is operated by user 22 to carry out an invasive therapeutic procedure, guided by map 110, at a therapeutic step 60. In the present example, laser console 49 is operated to irradiate ischemic region 114 via catheter 30 with high-intensity laser radiation, as described in the above-mentioned PCT patent application PCT/IL97/00011. The laser creates revascularization channels in the myocardium, which are marked by system 20 with spots 116 on map 110. The combination of the imaging, mapping and therapeutic modalities enables the user to concentrate the treatment in the region of heart 24 that is known to need it, and to ensure that the region is fully covered. Other local therapeutic and diagnostic procedures can similarly benefit from the guidance provided by map 110.

[0037] Although preferred embodiments are described hereinabove with reference to heart 24, the principles of the present invention may similarly be applied to imaging, mapping and treatment of other organs and body structures. It will thus be appreciated that the preferred embodiments described above are cited by way of example, and that the present invention is not limited to what has been particularly shown and described hereinabove. Rather, the scope of the present invention includes both combinations and subcombinations of the various features described hereinabove, as well as variations and modifications thereof which would occur to persons skilled in the art upon reading the foregoing description and which are not disclosed in the prior art.

#### APPENDIX A

[0038] This appendix provides details of step 54 in the method of Fig. 2, in which two 3D representations, *P* and *Q*, of a chamber of heart 24 are brought into mutual registration. To begin, a rough estimate is found for the transformation between *P* and *Q*, either manually, or using the principle axis of a bounding ellipsoid or by principle component decomposition. The bounding ellipsoid technique is further described in the above-mentioned European patent application EP 0 974 936

[0039] Fine registration between *P* and *Q* is then preferably found using a variation of the Iterative Closest Point (ICP) algorithm. This algorithm is described by Besl and McKay in "A Method for Registration of 3D Shapes," published in *IEEE Transactions on Pattern Analysis and Machine Intelligence* 14(2):239-256 (1992), which is incorporated herein by reference. The following steps are repeated until convergence:

1. Nearest point search: For each point *p* in *P* find the closest point *q* on *Q*. One can take a subset of points of *P* to improve computation speed. Similarly, all points of *Q* can be covered, too, to ensure robustness.
2. Compute registration: Evaluate a transformation *T* that minimizes the sum of squared distances between pairs of closest points (*p*, *q*). The transformation is preferably either rigid, similarity, affine or projective as described below.
3. Transform: Apply the transformation *T* to all points in *P*.

[0040] Given two surfaces,  $P$  and  $Q$ , and two sets of points,  $\{p_i \in P\}_{i=1}^n$ ,  $\{q_i \in Q\}_{i=1}^n$ , step 2 of this algorithm seeks a transformation,  $T$ , from a family of transformations (according to the possible families described below) that minimizes the mean square error,  $\epsilon$ , between the corresponding sets:

$$\epsilon^2 = \frac{1}{n} \sum_{i=1}^n \|q_i - T(p_i)\|^2$$

#### Affine and Projective Transformations

[0041] For affine transformations, defined as  $T(p) = Ap + t$ ,

$$A = \begin{pmatrix} a_{11} & a_{12} & a_{13} \\ a_{21} & a_{22} & a_{23} \\ a_{31} & a_{32} & a_{33} \end{pmatrix} \text{ is a } 3 \times 3 \text{ matrix, and } t = \begin{pmatrix} t_1 \\ t_2 \\ t_3 \end{pmatrix}$$

is a translation vector.  
We must minimize

$$\epsilon^2 = \frac{1}{n} \sum_{i=1}^n \|q_i - (Ap_i + t)\|^2. \text{ Denoting } p_i = \begin{pmatrix} x_{i1} \\ x_{i2} \\ x_{i3} \end{pmatrix},$$

and

$$q_i = \begin{pmatrix} y_{i1} \\ y_{i2} \\ y_{i3} \end{pmatrix},$$

we have three systems of equations:

$$\underbrace{\begin{pmatrix} x_{11} & x_{12} & x_{13} & 1 \\ x_{21} & x_{22} & x_{23} & 1 \\ \vdots & \vdots & \vdots & \vdots \\ x_{n1} & x_{n2} & x_{n3} & 1 \end{pmatrix}}_X \underbrace{\begin{pmatrix} a_{j1} \\ a_{j2} \\ a_{j3} \\ t_j \end{pmatrix}}_{a_j} = \underbrace{\begin{pmatrix} y_{1j} \\ y_{2j} \\ \vdots \\ y_{nj} \end{pmatrix}}_{y_j} \quad j = 1, 2, 3$$

[0042] Let a singular value decomposition of  $X$  be  $X = UDV^T$ . It then follows that  $a_j = VDU^T y_j$

[0043] Projective transformations are evaluated in a similar way to the affine case.

## Similarity and Rigid Transformation

[0044] Whereas in affine transforms triangles are transformed to triangles, similarity transformations preserve proportions. We seek a scaling factor,  $c$ , a  $3 \times 3$  rotation matrix,  $R$ , and a 3-dimensional translation vector,  $t$ , such that  $T(p) = cRp + t$ , wherein the error

$$\epsilon^2(R, T, c) = \frac{1}{n} \sum_{i=1}^n \|q_i - (cRp_i + t)\|^2$$

is minimized.

[0045] A suitable method for finding the desired similarity transform is described by Umeyama, in "Least-Squares Estimation of Transformation Parameters Between Two Point Patterns," published in *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 13(4): 376-380 (1991), which is incorporated herein by reference. Define the center of mass of both  $P$  and  $Q$ :

$$\mu_P = \frac{1}{n} \sum_{i=1}^n p_i$$

$$\mu_Q = \frac{1}{n} \sum_{i=1}^n q_i$$

[0046] Then define the variance of the points on both  $P$  and  $Q$ :

$$\sigma_P^2 = \frac{1}{n} \sum_{i=1}^n \|p_i - \mu_P\|^2$$

$$\sigma_Q^2 = \frac{1}{n} \sum_{i=1}^n \|q_i - \mu_Q\|^2$$

[0047] The covariance matrix between the two surfaces is

$$\Sigma_{PQ} = \frac{1}{n} \sum_{i=1}^n (q_i - \mu_Q)(p_i - \mu_P)^T$$

[0048] Let a singular value decomposition of  $\Sigma_{PQ}$  be  $\Sigma_{PQ} = UDV^T$ , and

$$S = \begin{cases} I & \text{if } \det(U)\det(V) = 1 \\ \text{diag}(1,1,-1) & \text{if } \det(U)\det(V) = -1 \end{cases}$$



[0049] The rotation, translation and scaling of the transformation are then given by:

$$R = USV^T$$

$$t = \mu_q - cR\mu_p$$

$$c = \frac{1}{\sigma_p^2} \text{trace}(DS)$$

wherein the trace of a matrix is the sum of its diagonal elements.

[0050] In the case of rigid transformation no scaling is applied, so that  $c = 1$ .

## Claims

1. A method for mapping a structure in a body of a subject, comprising:

capturing a three-dimensional (3D) image of the structure comprising diagnostic information;  
generating a 3D geometrical map of the structure using a probe inserted into the structure;  
registering the image with the map, such that each of a plurality of image points in the image is identified with a corresponding map point in the map; and  
displaying the map, such that the diagnostic information associated with each of the image points is displayed at the corresponding map point.

2. A method according to claim 1, wherein the diagnostic information:

is related to blood flow in the structure;  
comprises local perfusion data;  
comprises metabolic data;  
is related to uptake of a substance in tissue of the structure; or  
is related to motion of the structure.

3. The method of claim 1 or claim 2 wherein generating the geometrical map comprises bringing the probe into contact with the structure at a multiplicity of locations on the structure, and recording position coordinates of the probe at the locations.

4. The method of claim 3, wherein recording the position coordinates comprises determining the coordinates using a position sensor in the probe.

5. The method of any one of claims 1 to 4, wherein registering the image with the map comprises applying a transformation to at least one of the image and the map so that, following the transformation, the image and the map have a common axis and a common scale.

6. The method of claim 5, wherein registering the image with the map comprises dividing the image into a plurality of parallel planar slices, perpendicular to the axis and mutually spaced along the axis, and wherein the plurality of image points are located in the slices.

7. The method of claim 6, wherein registering the image with the map comprises finding an axial coordinate of each of the slices and an angular coordinate of each of the image points located in each of the slices, and identifying each of the image points with the map point having the same axial and angular coordinates.

8. The method of claim 7, wherein the structure comprises a wall defining a cavity, and wherein identifying each of the image points with the map point comprises finding, at the axial and the angular coordinate, the image point that is within a section of the wall.

9. The method of any one of claims 1 to 8, wherein displaying the map comprises coloring the map to reflect the diagnostic information.

10. The method of any one of claims 1 to 9, wherein the structure comprises a heart of the subject, and wherein generating the geometrical map comprises mapping an endocardial surface in a ventricle of the heart.

11. Apparatus for mapping a structure in a body of a subject, comprising:

an imaging device, adapted to capture a three-dimensional (3D) image of the structure comprising diagnostic information;  
 a probe, adapted to be inserted into the structure, so as to generate a 3D geometrical map of the structure;  
 a processor, coupled to the probe and the imaging device, and adapted to register the image with the map, such that each of a plurality of image points in the image is identified with a corresponding map point in the map; and  
 a display, coupled to be driven by the processor to display the map, such that the diagnostic information associated with each of the image points is displayed at the corresponding map point.

12. Apparatus of claim 11, wherein the diagnostic information:

is related to blood flow in the structure;  
 comprises local perfusion data;  
 comprises metabolic data;  
 is related to uptake of a substance in tissue of the structure; or  
 is related to motion of the structure.

13. Apparatus of claim 11 or claim 12, wherein, to generate the geometrical map, the probe is adapted to be brought into contact with the structure at a multiplicity of locations on the structure, and the processor is adapted to record position coordinates of the probe at the locations.

14. Apparatus of claim 13, wherein the probe comprises a position sensor for use in determining the position coordinates.

15. Apparatus of any one of claims 11 to 13, wherein the processor is adapted to register the image with the map by applying a transformation to at least one of the image and the map so that following the transformation, the image and the map have a common axis and a common scale.

16. Apparatus of claim 15, wherein the processor is further adapted to divide the image into a plurality of parallel planar slices, perpendicular to the axis and mutually spaced along the axis, wherein the plurality of image points are located in the slices.

17. Apparatus of claim 16, wherein the processor is adapted to find an axial coordinate of each of the slices and an angular coordinate of each of the image points located in each of the slices, and to identify each of the image points with the map point having the same axial and angular coordinates.

18. Apparatus of claim 17, wherein, when the structure comprises a wall defining a cavity, the processor is adapted to identify each of the image points with the map point by finding, at the axial and the angular coordinate, the image point that is within a section of the wall.

19. Apparatus of any one of claims 11 to 18, which is adapted to provide a map colored to reflect the diagnostic information.

20. Apparatus of any one of claims 11 to 19, wherein the structure comprises a heart of the subject, and wherein the geometrical map comprises a map of an endocardial surface in a ventricle of the heart.

21. Apparatus of any one of claims 11 to 20, and comprising a medical instrument adapted to perform a medical procedure on the structure guided by the diagnostic information displayed on the map.

22. Apparatus of claim 21, wherein the medical instrument is contained in the probe, which is adapted to be used to perform the procedure locally at locations selected on the geometrical map.

23. Apparatus of claim 22, wherein the processor is adapted to mark on the geometrical map the locations at which

the procedure was performed.

24. Apparatus of any one of claims 21 to 23 for carrying out therapeutic procedure.

5 25. Apparatus of claim 24, wherein the diagnostic information relates to local blood flow in the structure, for carrying out a therapeutic procedure for improving the local blood flow.

26. Apparatus of any one of claims 21 to 23 for carrying out a diagnostic procedure.

10

15

20

25

30

35

40

45

50

55

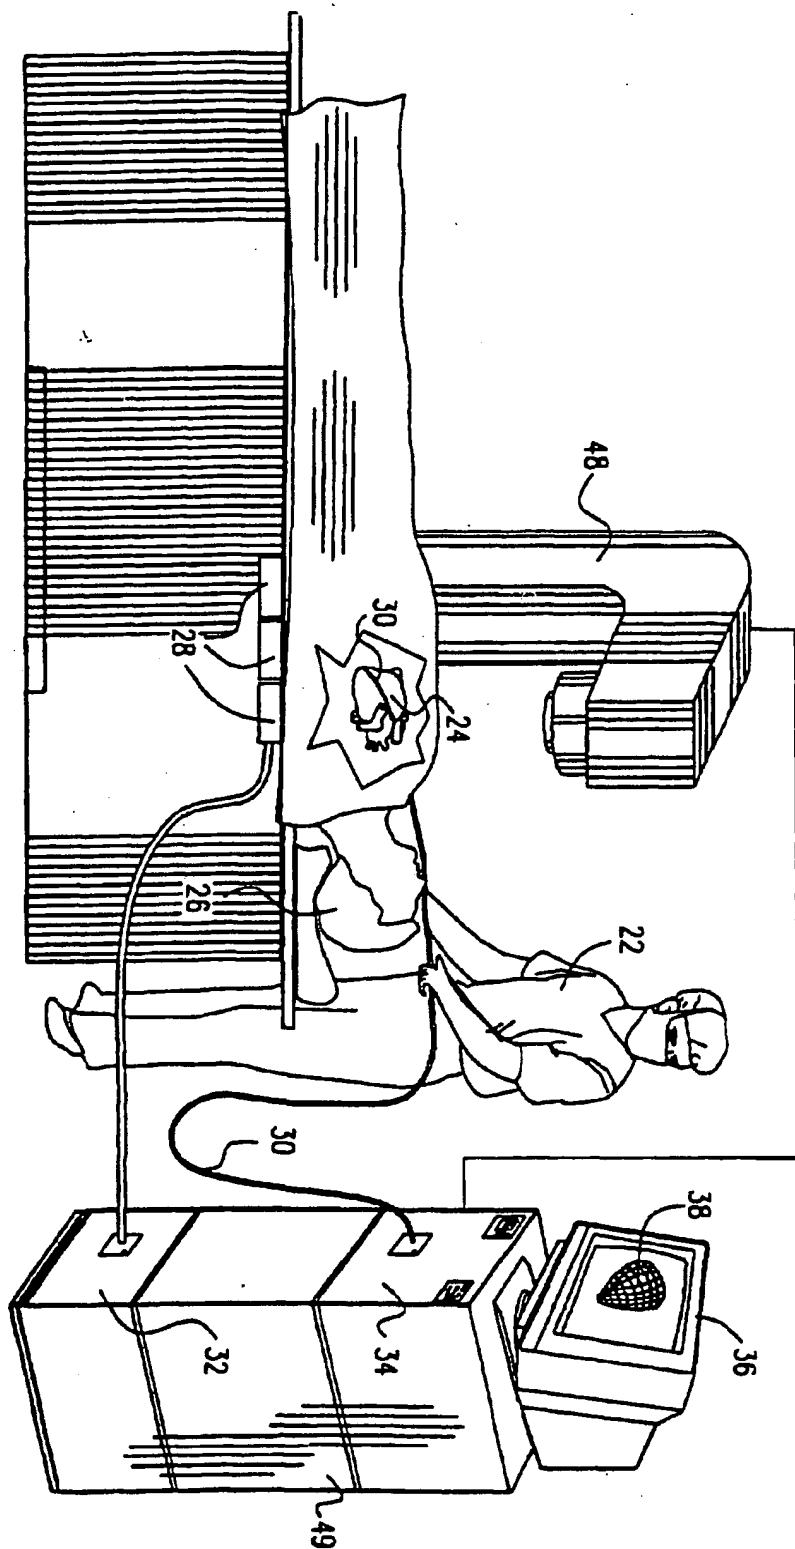
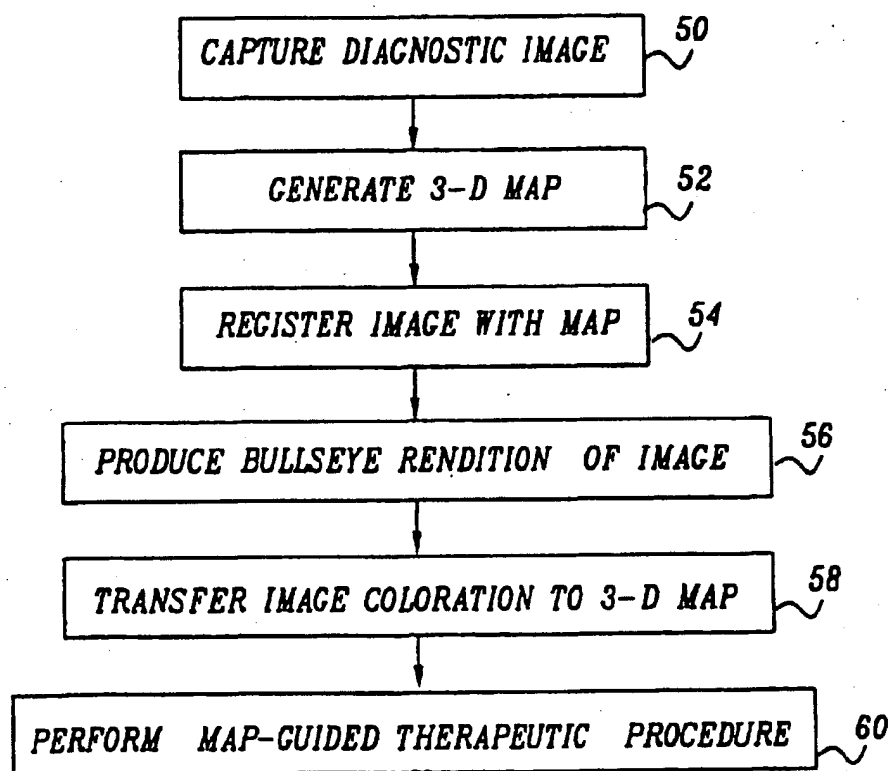


FIG. 1

20

FIG. 2



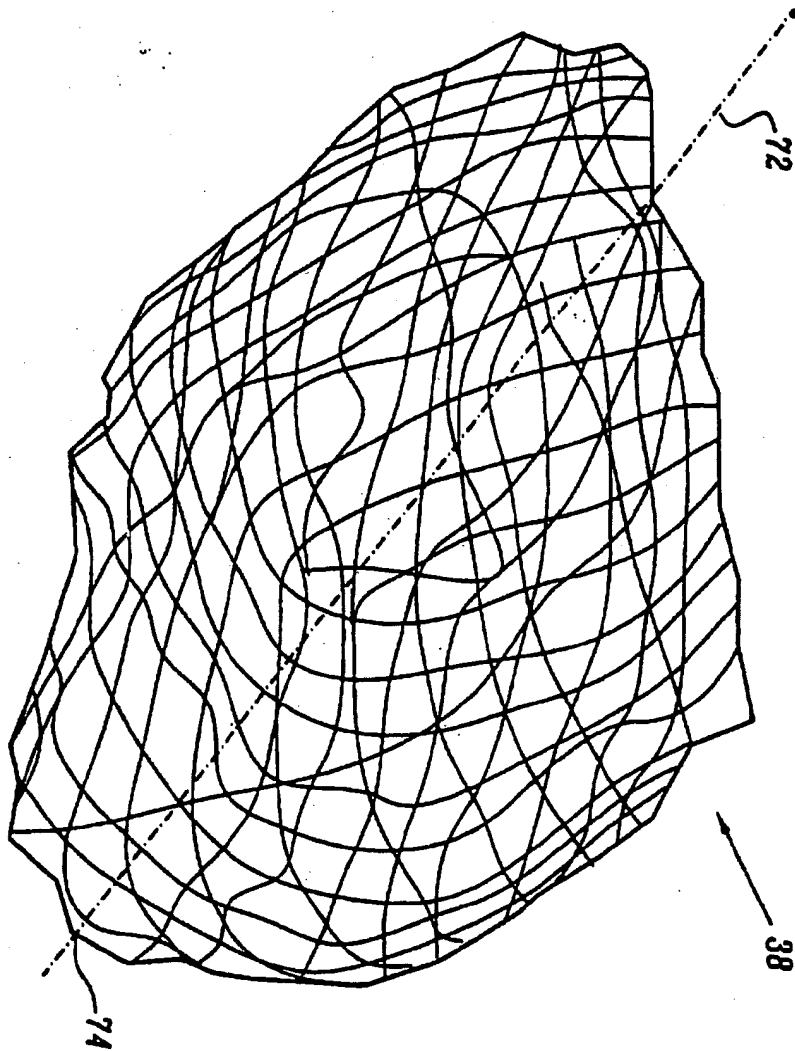


FIG. 3


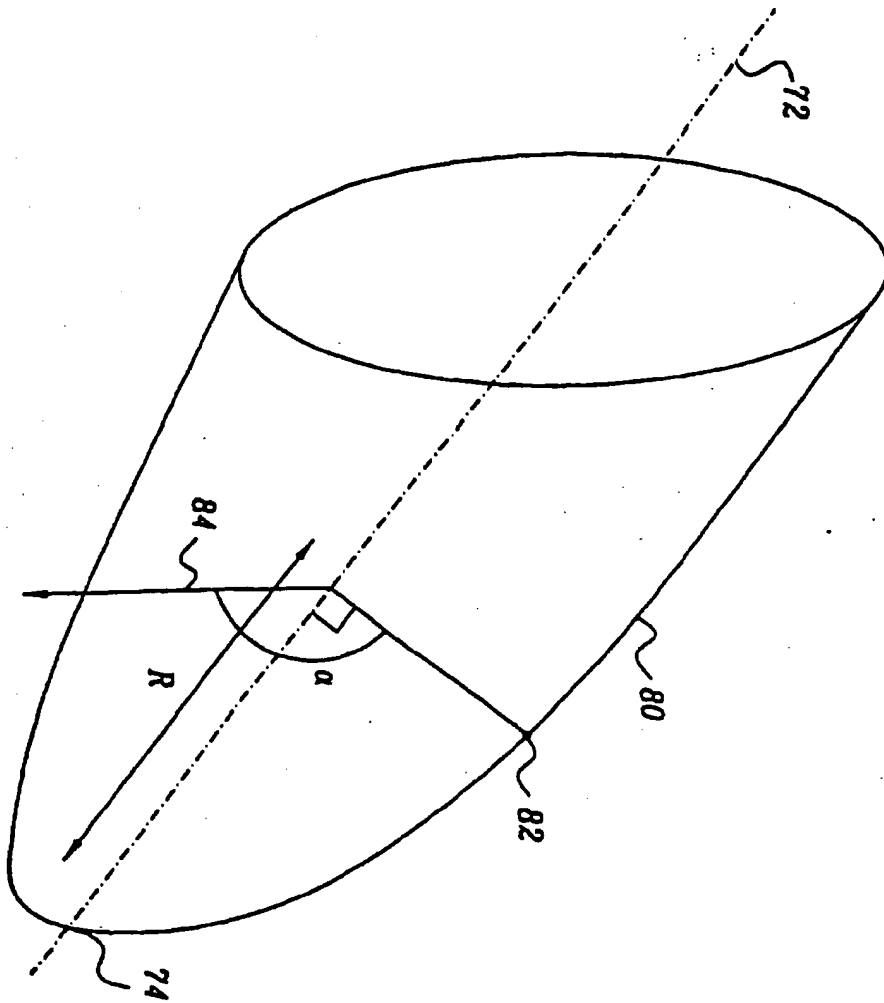


FIG. 4



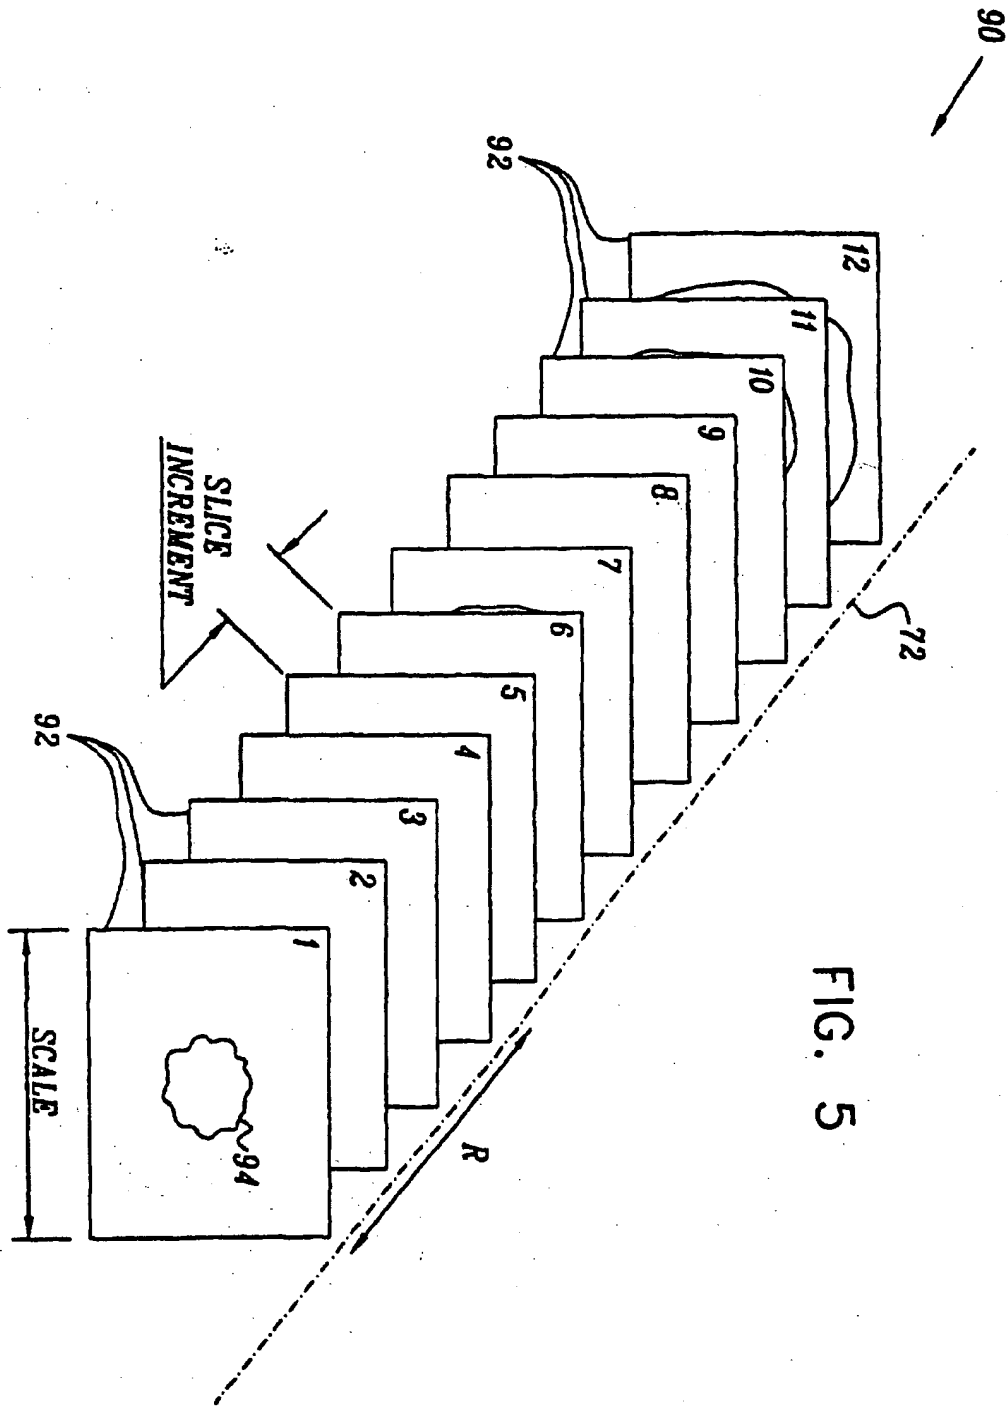

90

FIG. 6


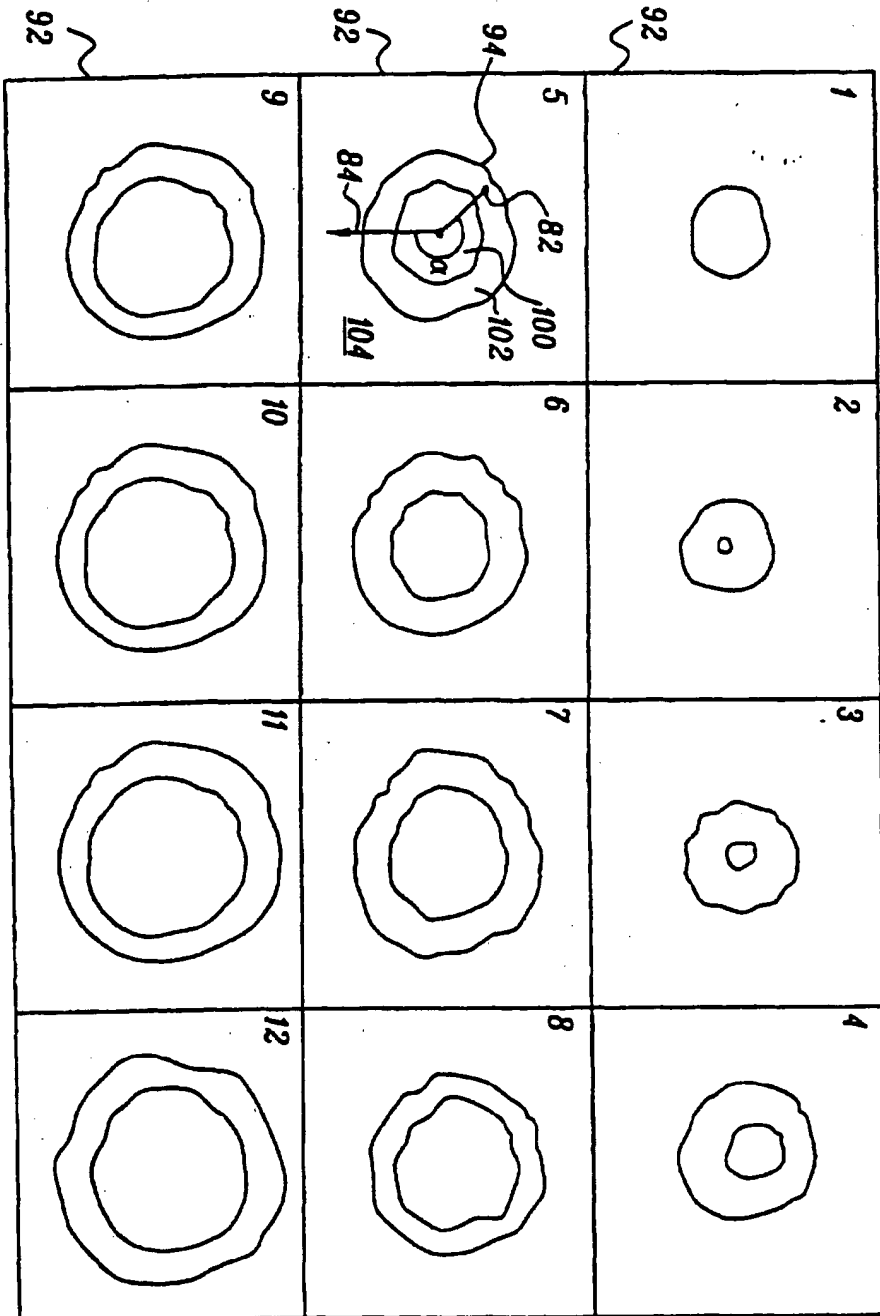


FIG. 7





Europäisches Patentamt  
European Patent Office  
Office européen des brevets

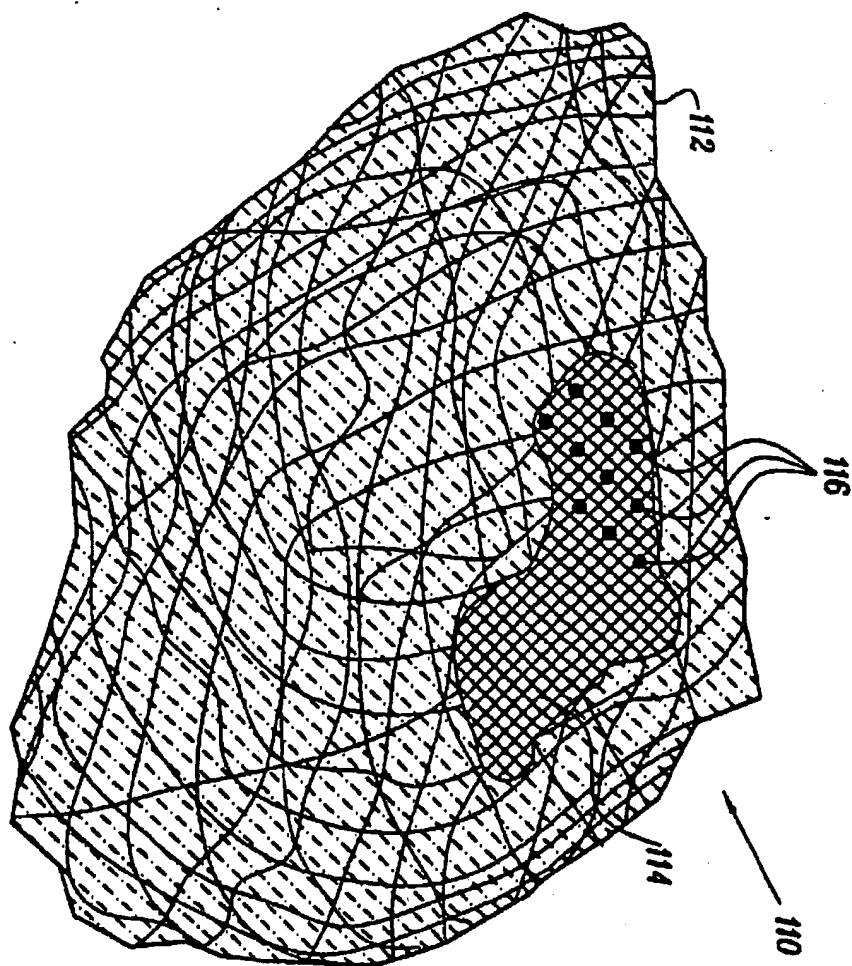

(11) EP 1 182 619 A3

(12) EUROPEAN PATENT APPLICATION

(88) Date of publication A3:  
29.09.2004 Bulletin 2004/40

(51) Int Cl.7: G06T 17/00

(43) Date of publication A2:  
27.02.2002 Bulletin 2002/09

(21) Application number: 01307001.6

(22) Date of filing: 17.08.2001

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE TR  
Designated Extension States:  
AL LT LV MK RO SI

(72) Inventor: Keidar, Yaron  
Haifa Israel 34990 (IL)

(74) Representative: Mercer, Christopher Paul et al  
Carpmaels & Ransford  
43, Bloomsbury Square  
London WC1A 2RA (GB)

(30) Priority: 18.08.2000 US 643666


(71) Applicant: Biosense, Inc.  
New Brunswick, New Jersey 08933-7003 (US)

(54) Method and apparatus for three-dimensional image rendering of body organs

(57) A method for mapping a structure in a body of a subject includes capturing a three-dimensional (3D) image of the structure comprising diagnostic information, and generating a 3D geometrical map of the structure using a probe inserted into the structure. The image

is registered with the map, such that each of a plurality of image points in the image is identified with a corresponding map point in the map. The map is displayed such that the diagnostic information associated with each of the image points is displayed at the corresponding map point.

FIG. 1

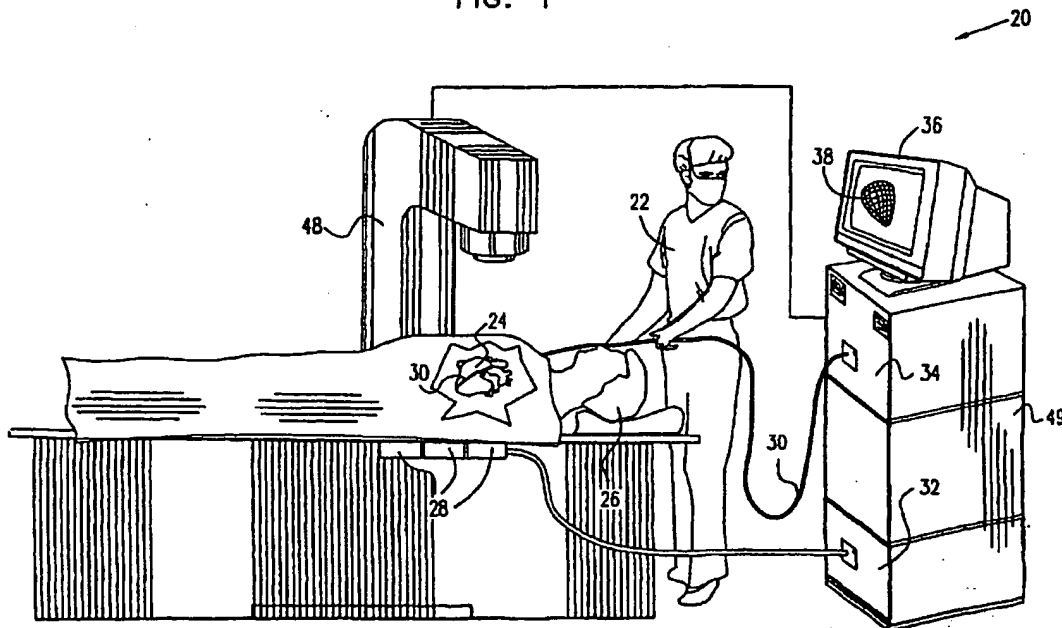

EP 1 182 619 A3



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 01 30 7001

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	SCHILLING ET AL: "Mapping and ablation of ventricular tachycardia with the aid of a non-contact mapping system" HEART, vol. 81, no. 6, June 1999 (1999-06), pages 570-575, XP002284986 * page 571, column 2, lines 26-31; page 572, column 1, lines 5-25 *	1,11	G06T17/00
X	* page 572, column 1, lines 21-24 *	9,19	
X	* figure 2 *	10,20	
D,X	US 5 738 096 A (BEN-HAIM SHLOMO) 14 April 1998 (1998-04-14) * column 9, line 5 - line 10 *	3,4,13, 14	
A	J B A MAINTZ, M A VIERGEVER: "A Survey of Medical Image Registration" MEDICAL IMAGE ANALYSIS, vol. 2, no. 1, March 1998 (1998-03), pages 1-36, XP002284987 * page 1, column 2, lines 14-16; page 6, column 2, lines 17-26 *	5,15	
A	T L FABER ET AL: "Three-Dimensional Displays of Left Ventricular Epicardial Surface from Standard Cardiac SPECT Perfusion Quantification Techniques" JOURNAL OF NUCLEAR MEDICINE, vol. 36, no. 4, April 1995 (1995-04), pages 697-703, XP008031998 * page 698 *	6-8, 16-18	G06T A61B
D,A	EP 0 974 936 A (BIOSENSE INC) 26 January 2000 (2000-01-26) * page 9, lines 39-40 *	21,24,26	
-/--			
The present search report has been drawn up for all claims			
Place of search: The Hague		Date of completion of the search 25 June 2004	Examiner Reise, F
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background O: non-written disclosure P: intermediate document</p> <p>T: theory or principle underlying the invention E: earlier patent document, but published on, or after the filing date D: document cited in the application L: document cited for other reasons &amp;: member of the same patent family, corresponding document</p>			

EPO FORM 1503 03/02 (P04C01)



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 01 30 7001

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	US 5 769 843 A (ABELA GEORGE S ET AL) 23 June 1998 (1998-06-23) * abstract *	24,25	
A	H YAMAGATA ET AL: "Development of a new display method for compound 3D ultrasound images: Fusion 3D images from B-mode and 3D doppler images" MEDICAL REVIEW, no. 70, 1999, pages 43-46, XP002284988 * abstract *	2	
A	J L BOXERMAN, T J MOSHER, E R MCVEIGH, E ATALAR, J A LIMA, D A BLUEMKE: "Advanced MR imaging techniques for evaluation of the heart and great vessels" RADIOGRAPHICS, vol. 18, no. 3, 1988, pages 543-564, XP002284989 * abstract *	2	
A	GULLBERG G T ET AL: "Imaging the mechanical, electrical, and physiological properties of the heart" ENGINEERING IN MEDICINE AND BIOLOGY SOCIETY, 1998. PROCEEDINGS OF THE 20TH ANNUAL INTERNATIONAL CONFERENCE OF THE IEEE HONG KONG, CHINA 29 OCT.-1 NOV. 1998, PISCATAWAY, NJ, USA, IEEE, US, 29 October 1998 (1998-10-29), pages 496-501, XP010320050 ISBN: 0-7803-5164-9 * page 496, column 2, lines 22-30 * ----- -/--	2	
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 25 June 2004	Examiner Reise, F
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ----- &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03 82 (9/01)



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 01 30 7001

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	<p>GILARDI M C ET AL: "Correlation of SPECT and PET cardiac images by a surface matching registration technique" COMPUT. MED. IMAGING GRAPH. (UK), COMPUTERIZED MEDICAL IMAGING AND GRAPHICS, SEPT.-OCT. 1998, ELSEVIER, UK, vol. 22, no. 5, 1988, pages 391-398, XP002284990 ISSN: 0895-6111 * page 391, column 1, lines 1-4 *</p> <p>-----</p>	2	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 25 June 2004	Examiner Reise, F
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 (03.82 (P04C01))

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 30 7001

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

25-06-2004

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5738096 A	14-04-1998	US 5546951 A	20-08-1996
		US 5391199 A	21-02-1995
		AU 715925 B2	10-02-2000
		AU 1170197 A	01-08-1997
		AU 710236 B2	16-09-1999
		AU 1170297 A	01-08-1997
		AU 712539 B2	11-11-1999
		AU 1206697 A	01-08-1997
		AU 724404 B2	21-09-2000
		AU 1206797 A	01-08-1997
		CA 2240943 A1	17-07-1997
		CA 2242353 A1	17-07-1997
		CA 2242356 A1	17-07-1997
		CA 2242360 A1	17-07-1997
		CN 1211930 A	24-03-1999
		DE 69726599 D1	15-01-2004
		DE 69728257 D1	29-04-2004
		EP 1382293 A2	21-01-2004
		EP 1428472 A2	16-06-2004
		EP 0888082 A1	07-01-1999
		EP 0944350 A1	29-09-1999
		EP 0888150 A1	07-01-1999
		EP 0910429 A1	28-04-1999
		WO 9724983 A2	17-07-1997
		WO 9724981 A2	17-07-1997
		WO 9725101 A2	17-07-1997
		WO 9725098 A1	17-07-1997
		WO 9937208 A1	29-07-1999
		IL 125136 A	31-07-2003
		IL 125259 A	01-12-2002
		IL 125260 A	24-06-2003
		US 6066094 A	23-05-2000
		US 6317631 B1	13-11-2001
		US 6285898 B1	04-09-2001
		US 2003139668 A1	24-07-2003
		US 6498944 B1	24-12-2002
		US 2003191383 A1	09-10-2003
		US 6363279 B1	26-03-2002
		US 6330476 B1	11-12-2001
		US 2002045809 A1	18-04-2002
		US 2002045812 A1	18-04-2002
		AT 188108 T	15-01-2000
		AT 253864 T	15-11-2003
		AU 1693095 A	14-03-1996
		CA 2197986 A1	29-02-1996
		CN 1168625 A	24-12-1997

EPO FORM PWS9

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 30 7001

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

25-06-2004

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5738096 A		DE 69514238 D1	03-02-2000
		DE 69514238 T2	11-05-2000
EP 0974936 A	26-01-2000	US 6226542 B1	01-05-2001
		CA 2278380 A1	24-01-2000
		EP 0974936 A2	26-01-2000
		US 6301496 B1	09-10-2001
		US 2001009974 A1	26-07-2001
US 5769843 A	23-06-1998	CA 2247505 A1	21-08-1997
		EP 0901399 A1	17-03-1999
		JP 2001509038 T	10-07-2001
		WO 9729803 A1	21-08-1997

EPO FORM P0453

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**